



PENDANT & SUSPENSIONS  
LUMINAIRES

advanced systems



**SALUTO**  
TECHNICAL SPECIFICATION DATA


Strategic Lighting Group | Strategic Lighting (Europe) Limited | Narrow Lane End Works, 64 Worple Road, Epsom, Surrey KT18 7AG | England UK  
Tel. +44 (0)845 241 4631 | Fax. +44 (0)845 241 4632 | Email. info@strategiclighting.com | www.strategiclighting.com



# SALUTO

monochromatic - DALI-dimmable

IP20

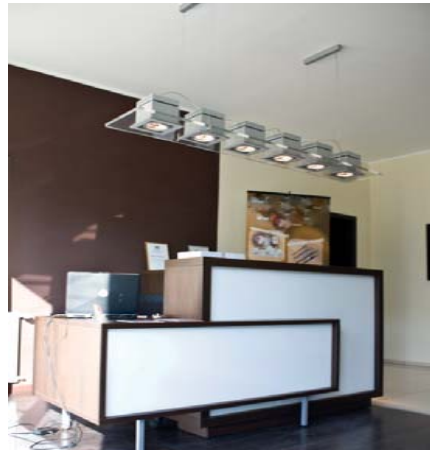

### Product Purpose & Meaning

Saluto's [Sal-Ooo-Tow] character is distinguished by an elegant transparent clear acrylic canopy with 4 or 6 spot downlights.  
 • The name "Saluto" is derived from the Italian for "greeting". The product name is born out of the fittings use in reception areas. The luminaire has been used in many applications including museums, hotels and meeting rooms.

### Product Summary

- Decorative acrylic profile LED pendant suspension with linear array of adjustable led spotlights.
- High Output 32W LED 2000lm in fixed medium 34°.
- Metal Halide option 35W / 70W CDM-T in 24°,34°&44° beam.
- Integral Gear.
- Available as 4 or 6 array or custom.

### Applications

- Ideal for showrooms and retail.
- Reception areas & desk.
- Display & exhibitions.

### LED Performance

Lamp Type	LED: 19W/20W & 29W/32W PowerLEDs
LED Qty	Multiple Overlaid
Lamp Source	LED : Philips Fortimo SLM Series
Lumen Output	LED : 1,500lms/2000lms – 20W / 32W
Lamp CRI	LED > 80
LED Life	LED : 50,000hrs [IEC electronic default]
Optic Beams	Medium 32° (Half Peak Brightness)
LED Colours	Monochromatic Whites
Working T°C	- 30°C / +85°C

### CDM-T Performance

Lamp Type	Metal Halide : 35W / 70W CDM-T
Lumen Output	Metal Halide : 35W - 3,300lms 70W - 6,600lms
Lamp CRI	> 80
LED Life	Metal Halide : 12,000hrs
Colours	Metal Halide : 3000K / 4200K

### Electrical Data

Voltage	230Vac mains
Load Watts	LED 19W-32W / CDM-T 35W-70W
Cable Terminal	Yes
Gear	Integral
Configuration	Mains Power
Dimming	LED Fortimo only
Data Protocol(s)	DALI Touch

### Description

A decorative acrylic slimline pendant module with a geometric array of banked spot downlights utilising 2000lm high quality superior commercial grade Philips "Fortimo SLM" series LED for ultimate confidence. Available in optional 3000K or 4000K White LED's with highly polished performance reflector. Full photometrics and calibrated heat sink for reliability. LED designed in medium 34° beam. Metal Halide option up to 70W in optional 24°, 34° & 44° beam angles. Ideal for high quality down spot lighting of energy efficient areas. Integrated gear on all lamp types. Suspension by discreet modern fine-wire cable with variable drop height. [1.0metre standard- other lengths optional]. Dimmability is available with digital DALI Touch. Variant number of spots & spacing on request.

### Construction & Finishes

Pressed formed steel chassis and decorative acrylic panel with smooth knurled edges. Finish in painted aluminium with custom RAL options available on request.

### Main Features

- 24° - 44° medium beams
- White options - 3000K to 4000K
- Integrated gear
- Metal Halide options

### Mounting

- Fine-wire suspension to 1.0metre [as standard].
- **3 Core Connectors** : Live & Neutral power feeds - with functional Earth

### Connection Diagram A

- Connection is for standard main voltage.
- See Connection Diagram A - Page 324.

### Standard Colours

- Warm White - 3000K - CRI > 80%
- Neutral White - 4000K - CRI > 80%



Energy Saving Technology



Green Energy Technology




Lamp Type Technology



Wattage - Unit LED - dimmable



Voltage - mains supply only



Driver / Gear Integral



Lumens / Watt values - LED/ CDM-T



CRI - Index value - Warm White



IP Rating Exterior Use



Insulation Class 3 - SELV



Product Weight Kilograms/unit



ENEC compliance



CE mark



F - mark fire safe rating




Environmental Technology

# LED option



# SALUTO

monochromatic - DALI-dimmable

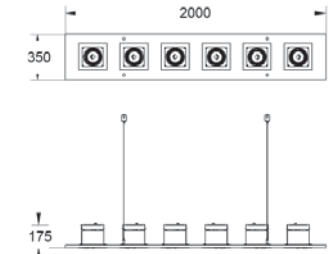

### Product Order Codes

#### LED Version

##### 4 - Spot

4 - Spot downlights in LED with beam angle 34°

SAL.420.3	CRI >80 - Warm	LED - 3000K	4 x 20W	1500lm	Optic - 34°
SAL.419.4	CRI >80 - Neutral	LED - 4000K	4 x 19W	1500lm	Optic - 34°
SAL.432.3	CRI >80 - Warm	LED - 3000K	4 x 32W	2000lm	Optic - 34°
SAL.429.4	CRI >80 - Neutral	LED - 4000K	4 x 29W	2000lm	Optic - 34°

##### 6 - Spot

6 - Spot downlights in LED with beam angle 34°

SAL.620.3	CRI >80 - Warm	LED - 3000K	6 x 20W	1500lm	Optic - 34°
SAL.619.4	CRI >80 - Neutral	LED - 4000K	6 x 19W	1500lm	Optic - 34°
SAL.632.3	CRI >80 - Warm	LED - 3000K	6 x 32W	2000lm	Optic - 34°
SAL.629.4	CRI >80 - Neutral	LED - 4000K	6 x 29W	2000lm	Optic - 34°

POST-FIX CODES For dimming DALI versions - please add post-fix " - DALI"

#### CDM-T Version

##### 4 - Spot

4 - Spot downlights in Metal Halide CDM-T with beam angle 34°

SAL.435	CRI >84 - CDM-TC	White 3000/4200K	4 x 35W -	3000lm	Optic - 34°
SAL.470	CRI >84 - CDM-TC	White 3000/4200K	4 x 70W-	6600lm	Optic - 34°



##### 6 - Spot

6 - Spot downlights in Metal Halide CDM-T with beam angle 34°

SAL.635	CRI >84 - CDM-TC	White 3000/4200K	6 x 35W -	3000lm	Optic - 34°
SAL.670	CRI >84 - CDM-TC	White 3000/4200K	6 x 70W-	6000lm	Optic - 34°

### POST-FIX CODES

CDM beam angle default is 34°, for other angles - please add post-fix "24" or "44" respectively.  
**important note:** beam angles & lumen outputs are approximate and guide only - please refer to full photometric data, lamp manufacturers data or consult our technical dept.

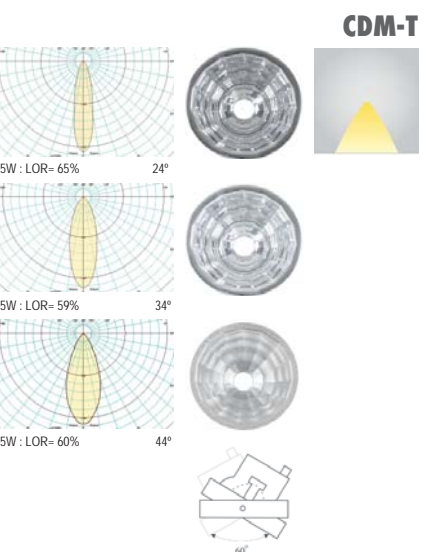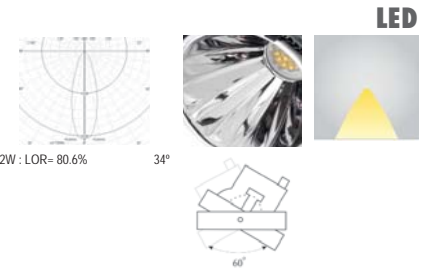

## PENDANT SUSPENSION LUMINAIRES

product pages start page 73

retail & leisure

### PENDANT AMBIENT - T5

T5 - 2x24W+ Page 75



CAMEO SQUARE

T5 - 2+2x54/39W Page 75



CAMEO

T5 - 2+2x54/39W Page 74



SEGMENTO

Page 77



HOTEL LOBBY RECEPTION

### PENDANT SUSPENSION

T5 - 2x80W Page 83




CLASSIC frame - prismatic

T5 - 6x54W Page 83



CLASSICA frame - opal

T5 - 4x54W Page 79



ELEGANTA frame - indirect

T5 - 4x54W Page 79



ELEGANTA frame - direct

TC-L - 4x55W Page 87



QUADINI

Page 85



CONFERENCE HALLS

Page 81



COMMERCIAL OFFICES

Page 88



CORRIDORS

## PENDANT SUSPENSION LUMINAIRES

retail & leisure

product pages start page 73

### CONTEMPORARY

Page 91 T5 - 3x24W



XPEDIA

Page 91



ATRIA

Page 90



STAIRWELLS

### LINEAR

Page 67 T5 - 2x54W



XICATA - ROTATOR 2

Page 103 LED - 20W/m



AMBIENTALE

Page 93 LED / CDM-T option LED



VELA PUNTI

Page 95



RETAIL SHOWROOMS

### SPOTS

Page 96 LED / CDM-T LED option



PUNTO VENDI series

Page 97 LED / CDM-T LED option



PUNTO VENDI series

Page 97 LED / CDM-T LED option



PUNTO VENDI series

Page 99 LED / CDM-T LED option



SALUTO

Page 101 LED / CDM-T LED option




ORBITO 5

Page 87 T5 - 4x24W LED option




QUADINI - SPOTS

Page 96



RETAIL MERCHANDISE

Page 72



RECEPTION AREAS

Page 89



SHOPPING MALLS